

# 1-Pager — on Changing Appliance IPs —

Site IT will sometimes alter their network and a change in appliance IP addresses is needed

*Changing the IP addresses of the primary and secondary appliances will take more than just changing the addresses in the Configure Network area of the appliance admin GUI.*

## » PREP WORK

### Step 1


Log in to the primary appliance, select Cluster Management and click Data Replication.

### Step 2

Select Disable from the Replication State drop-down menu and click Save/Refresh.

### Step 3

Return to the Main Menu.

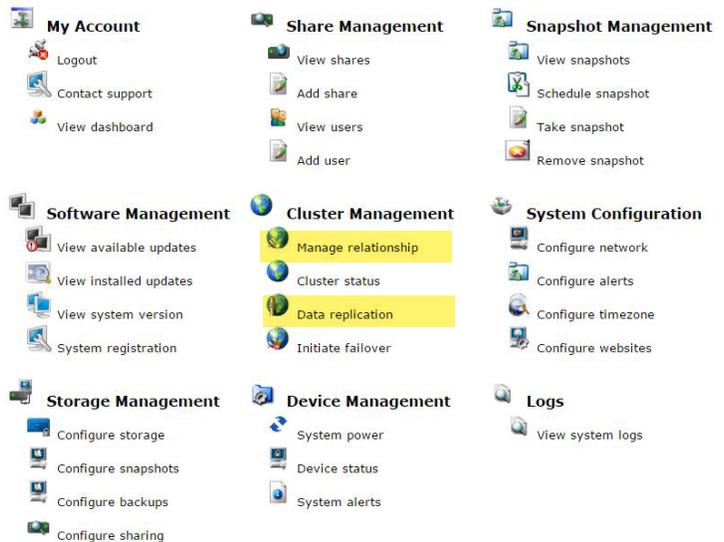

## » CHANGE IP ADDRESSES

### Step 1

Under System Configuration on the secondary appliance, select Configure Network.

### Step 2

Change the IP Address, Gateway and DNS settings to accommodate the site's new network settings.

### Step 3

Once the secondary has been changed and rebooted, change the IP address, network information and cluster virtual IP address on the primary.

### Step 4

Click Save Settings. If you get an error, continue to steps 5 and 6.

### Step 5

On the primary appliance, select Blox Management and then click Pool Manager.

### Step 6

Click Remove to remove the old Pool information. It will immediately be replaced with the new network information.

## » REPLICATION

### Step 1

Go to the primary appliance and select Cluster Management and choose Data Replication.

### Step 2

Under Replication State, the secondary frequency should be set to 5 minutes.

### Step 3

Set up the replication schedule.